



Features:

- ▶ Consistent Reliability with high accuracy
- ▶ Time delay user settable
- ▶ LED Indication for healthy/ faulty status
- ▶ Compact size
- ▶ Under voltage relay/ delayed restart



Advantages:

- ▶ Protection of power assets
- ▶ Detection and isolation of faults
- ▶ Speedy tripping to avoid damage
- ▶ Maintain supply continuity of healthy circuit

Applications:

- ▶ Control Panel
- ▶ Feeder/Motor
- ▶ Generator
- ▶ Transformer
- ▶ Electrical Distribution

Input Specification

System	1Ø-2 wire/3Ø-4 wire
Burden on supply	< 3VA
Delay	5 to 15 min (Restart time)

Mechanical Specification

Dimension	78x17.5x97 mm (LxBxH)
Mounting	DIN Rail (35mm)
Weight	75 g

Set Point

Set Point	- 25% of nominal voltage (factory set)
-----------	----------------------------------------


Output Specifications

Relay Contacts	1 Potential free Contact (NO, C & NC)
De-energise	On fault
Contact Rating	6A/230V AC/28V DC
Nominal Voltage	380/415/440V AC


Environmental Specifications

Operating Temperature	-10°C to 55°C
Storage Temp	-20°C to 75°C
Humidity	< 95 RH

Dimension



Connection Diagram

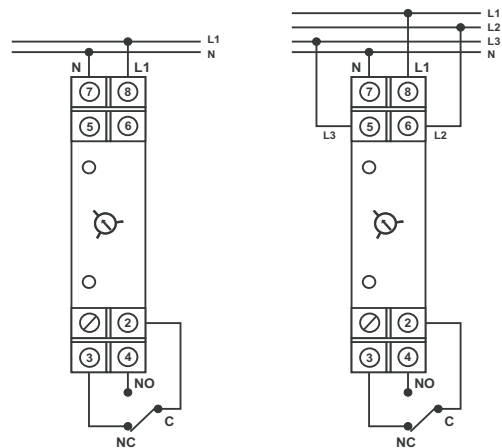

Ordering Information

Ordering Code	Description
VIPS-102-1P	Under Voltage Relay-1 Phase
VIPS-102-3P	Under Voltage Relay-3 Phase